



GTD35000 SERIES


"Ground to Dock" Drive-In Ramps



bridging the vertical gap

Why should you buy or lease an Adapt-A-Ramp?

- Adapt-A-Ramp Drive-In Ramps are a cost effective solution that enable you to safely drive vehicles in and out of buildings at truck level that are not equipped with ground level access.
- Adapt-A-Ramps are a safe alternative and have several built in safety features to protect your workers.
- All of our ramps have been stress analyzed and exceed a 2 to 1 factor of safety.
- Available in several sizes and load capacity ratings, we have a ramp to suit your application or we will design one that does.

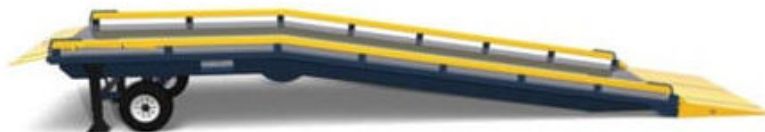

The GTD35000 Adapt-A-Ramp has a wide range of applications and a generous capacity rating allowing you to easily convert a truck level dock to a drive-in access to your building.

Adapt-A-Ramp's have several unique features offering excellent operational safety and reliability!

Ease of Mobility & Adaptability

The GTD35000 is equipped with adjustable support legs and wheels enabling you to easily move it to another location and readjust the height to suit the new dock elevation.

Hinged Tail Plate

The Hinged Tail Plate is 60 inches long and is located on the lower end of the ramp. This feature helps to improve ramp stability by helping to compensate for uneven yard surfaces thus creating a smooth transition on and off the ramp.



Hinged Lip Plate

This heavy duty Hinged Lip Plate is attached by a full length seamless hinge fully supported and has a chamfered leading edge for a smooth and safe transition between the loading dock and the ramp.



All Steel Heavy Duty Construction:

All Adapt-A-Ramps are constructed of steel for structural rigidity. Our designs undergo a complete stress analysis to insure structural integrity and superior operational safety. **All ramps exceed a 2 to 1 load rating safety factor.**

Built-In Side Rails:

The Built-In Side Rails are 16" high and run the full length of the ramp to help avoid accidentally driving off the side of the ramp. Higher guard rails are available.

Anti-Slip Surface:

The full length of the deck has an Anti-Slip Surface, offering superior traction for safer operation.

Leveling Jacks:

Dual speed leveling jacks speed up leveling the ramp to the loading dock. These Jacks are fully supported and strategically located to maximize the stability of the ramp for optimum operator safety.

GTD 35000 SPECIFICATIONS

Load Capacity:

Up to 35,000 Pounds (GVW)

Ramp Dimensions:

90" -120" Wide x 34' Long

Incline Section:

30' Long

Upper Level-off Section:

4' Long

Ramp Height - Adjustable:

45" to 55" (other ranges available)

Upper Lip Plate -Hinged:

20" X 90" (Full Width)

Leveling Jacks: Dual Speed

Custom Sizes Available On Request



479 BRANT COUNTY ROAD 18 - BRANTFORD ON N3S 0H4
www.liftway.ca

1-800-543-8929

